

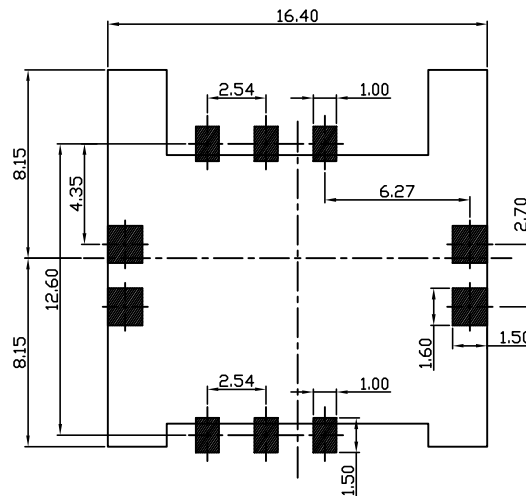
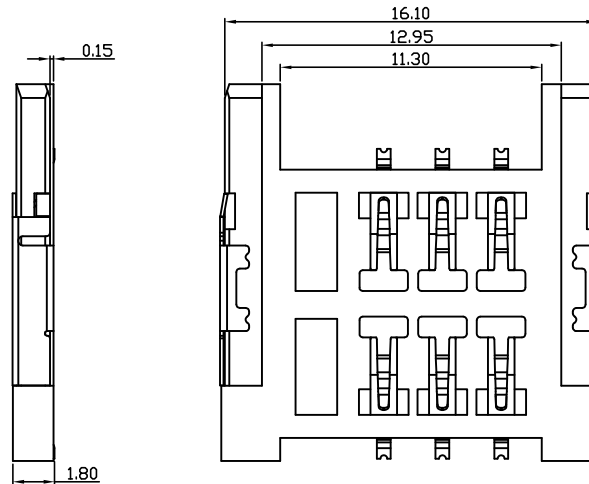
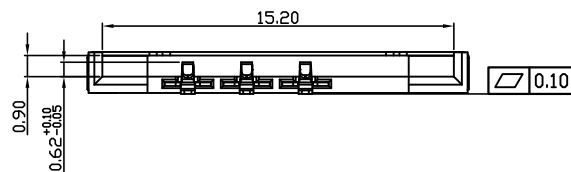


RoHS

REV.	EC#	DESCRIPTION	DATE	DRAWING	CHECKED	APPROVED
A0		NEW RELEASE	07/12'16	YZZ		HAIYONG

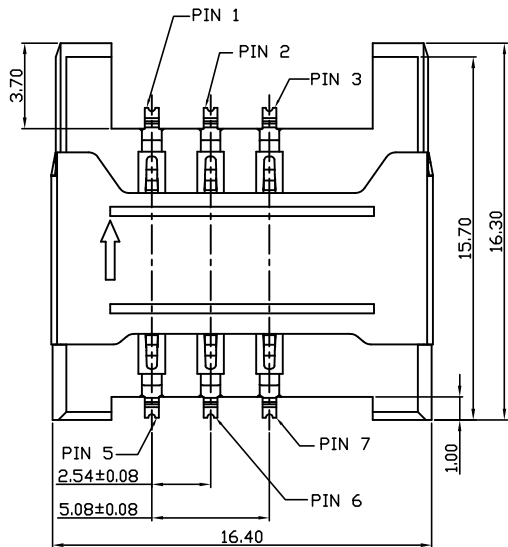

Recommended PCB Layout

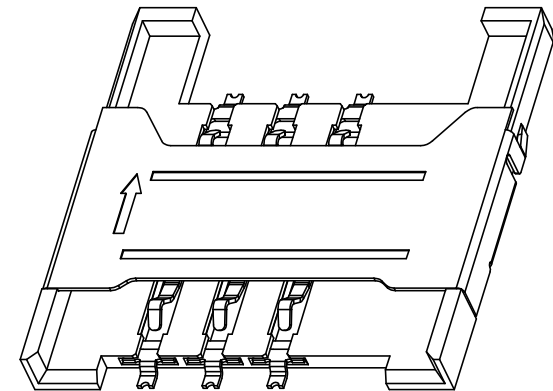

- 备注:
1. 材质:
 - 1.1胶芯: LCP UL94V-0
 - 1.2端子: 磷铜, 半金锡, 触点镀金G/F, 雾锡80U"
 - 1.3外壳: SUS, 镍底30μ", 焊接脚镀金G/F
 2. 主要特性:
 - 2.1额定电流: 0.5A
 - 2.2接触阻抗: 50mΩ MAX
 - 2.3绝缘阻抗: 100MΩ MIN 100V DC
 - 2.4耐压测试: 100V AC
 - 2.5沾锡性: 温度235±5℃, 时间5±0.5s
 - 2.6单PIN正向应力: 0.035kgf MIN
 - 2.7使用寿命: 1000次
 - 2.8耐温性: 烤箱测试: 温度250±5℃, 时间2分钟
 - 2.9工作环境: 温度: -30℃~+80℃; 湿度: 80% MAX

PIN NO.	PIN NAME
PIN 1	Supply Voltage Vcc
PIN 2	Resrt (RST)
PIN 3	Clock (CLK)
PIN 5	Ground
PIN 6	Programming Voltage Vpp
PIN 7	I/O
PIN 4/8	N/A

MILLIMETERS	INCH	UNITS	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
X° ± 2°	X° ±	MM				
.X ± 0.30	.XX ±	MAT'L				
.XX ± 0.25	.XXX ±	SEE NOTES				
.XXX± 0.15	.XXXX±	FINISH				
		SEE NOTES	PART NUMBER: XB-402011882-A	TITLE: SIM CARD 6PIN 1.8H (有挡)		
			APPD: HAIYONG	DWG NO.: C-402011882-00		
		QTY	CHKD: --			
		SEE NOTES	DR: YZZ			
				SCALE 1:1	SHEET 1/2	REV. A0