

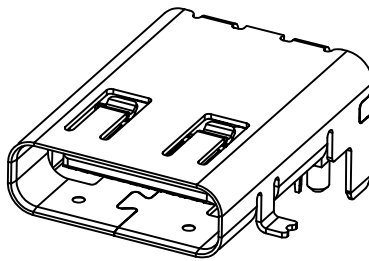
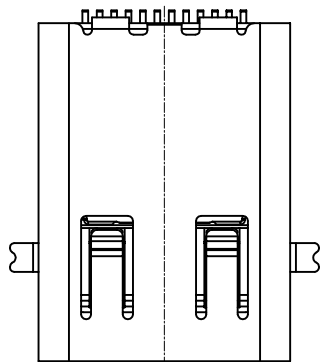
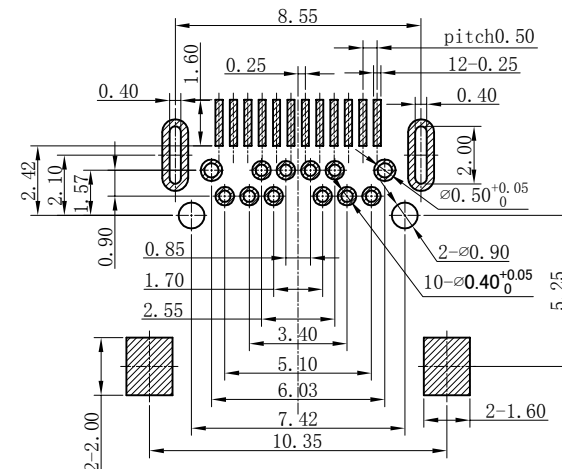



ROHS

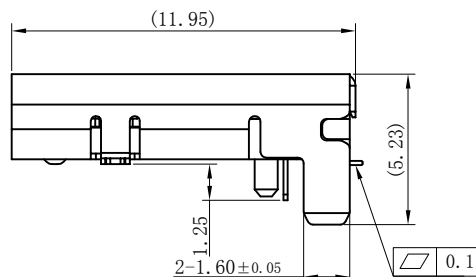

3D VIEW

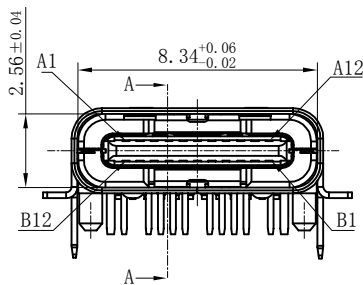

RECOMMENDED PCB LAYOUT (TOP VIEW)
DEFAULT TOLERANCE: ±0.05

NOTES:

1. MATERIAL:



- 1.1 HOUSING: LCP UL94 V-0
- 1.2 CONTACT: COPPER ALLOY
- 1.3 SHELL: STAINLESS STEEL

2. FINISH:

- 2.1 CONTACT: Au 30u" Min. ON CONTACT AREA;
MATTE TIN PLATING ON SOLDER TAIL;
Ni ALL OVER;
- 2.2 SHELL: SOLDERABILITY Ni PLATING OVER ALL;

3. ELECTRICAL:

- 3-1. INSULATION RESISTANCE:
100 MEGAOHMS MIN.
- 3-2. DIELECTRIC WITHSTANDING VOLTAGE:
100VAC MIN.
- 3-3. LOW LEVEL CONTACT RESISTANCE:
INITIAL 40mΩ MAX.
AFTER 50mΩ MAX.
- 4. MECHANICAL CHARACTERISTICS:
4-1. MATING FORCE: 5~20N;
4-2. UNMATING FORCE: 8~20N (INITIAL), 6~20N (AFTER 10000 CYCLES);
4-3. DURABILITY: 10,000 MATING CYCLES.
4-4. OPERATING TEMPERATURE: -40° C TO +80° C

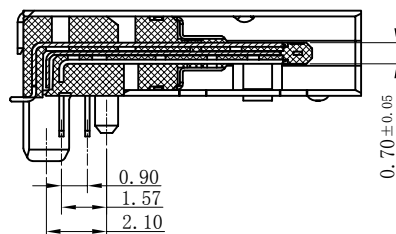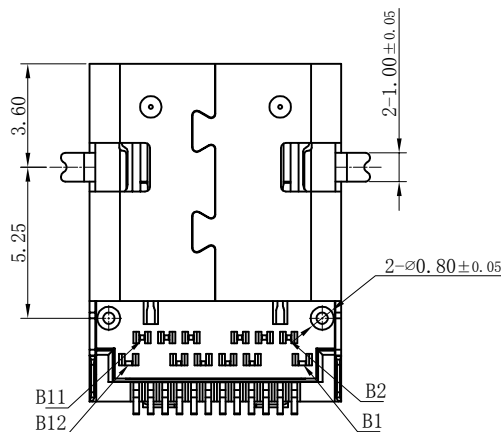

SECTION A-A


PIN ASSIGNMENTS:

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND	TX1+	TX1-	V _{BUS}	CC1	D+	D-	SBU1	V _{BUS}	RX2-	RX2+	GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1
GND	RX1+	RX1-	V _{BUS}	SBU2	D-	D+	CC2	V _{BUS}	TX2-	TX2+	GND

MILLIMETERS	INCH
X. ° ±2°	X. ° ±2°
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004


		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
TITLE		USB4 24P Type-C FEMALE CH=1.65mm		DR	
PART NO.		XB-104306622-A		CHKD	
PRO J.		PAGE	1/1	UNITS	mm
		SIZE	A4	SCALE	1:1
		DIS NO.	UC026-010		

ROHS



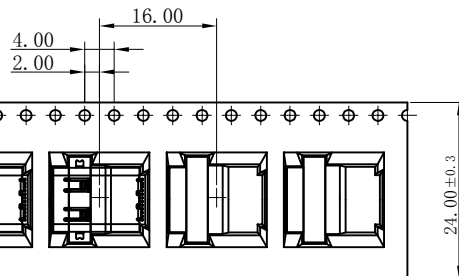
Direction of use
→

NOTES:

- 1、Packing quantity per plate: 750PCS/Plate
- 2、Loading and packing method

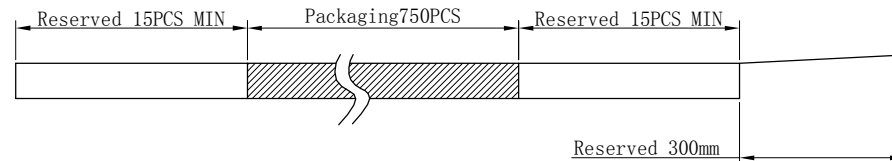

3、Total packaging: 7500PCS/Box

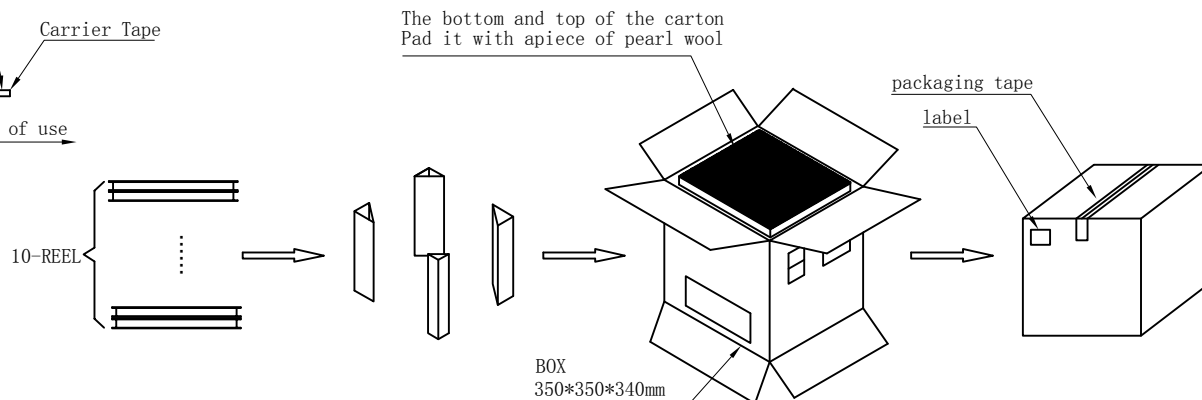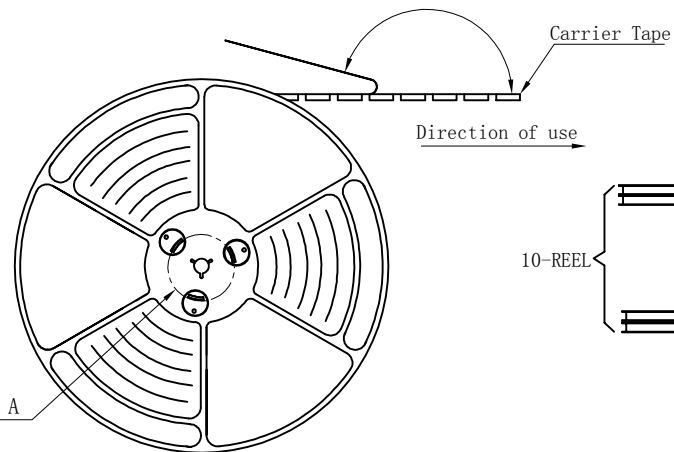

Part Number	Description	Quantity
303026622	Carrierband (Lucent, PET W=24 PH=16, T=0.4)	124.8M
303040009	Box (K=K, T=7.0, 350*350*340)	1PCS
303060001	PE Bag (T=0.08mm, 730*760*730)	1PCS
303070024	Self-adhesive (W=21.30)	127.8M
303110001	Beam (K=K, T=7.0, 95*95*290)	4PCS
303130001	Pearl Wool (340*340*18)	2PCS
303180017	REEL (BLUE, 13Inches*24mm, φ330)	10PCS
104306622-A	USB4 24P Type-C FEMALE CH=1.65mm <UC026-010>	7500PCS

MILLIMETERS	INCH
X. ° ±2°	X. ° ±2°
.X ±0.30	.X ±0.012
.XX ±0.20	.XX ±0.008
.XXX ±0.10	.XXX ±0.004

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

TITLE	USB4 24P Type-C FEMALE CH=1.65mm		DR	X. F. Wang	2022.04.03
PART NUM.	XB-104306622-A		CHKD		
PRO J.	PAGE	2/2	UNITS	mm	APPD
SIZE	A4	SCALE	1:1	DIS NO.	UC026-010