

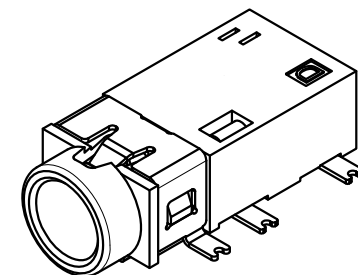
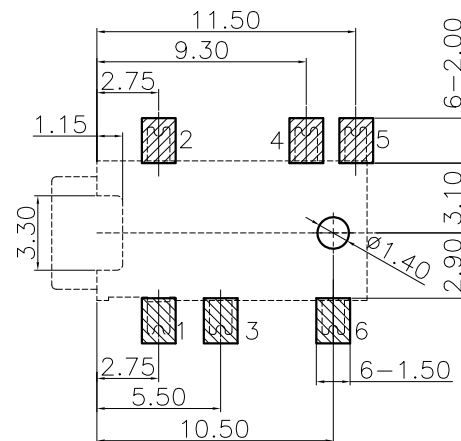
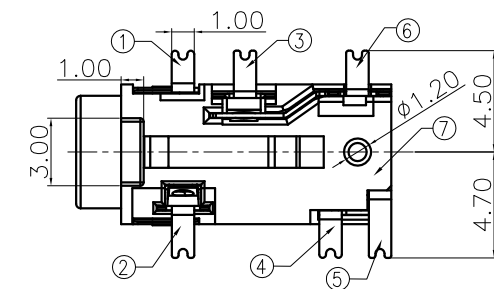
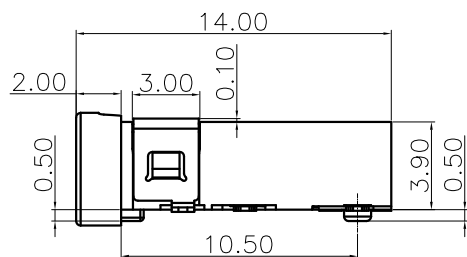
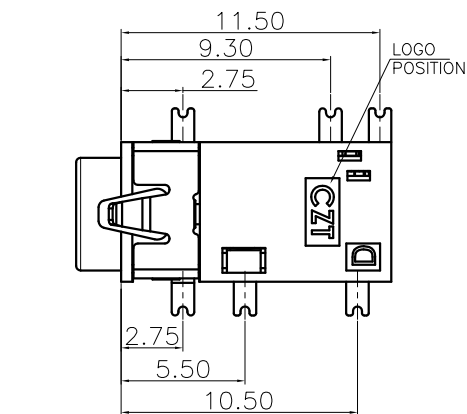


**Halogen Free**

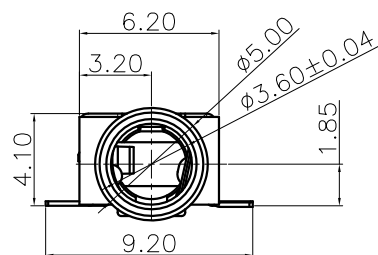

3D VIEW



IR spec: 260°C for 30s

|     |                                                                                     |      |
|-----|-------------------------------------------------------------------------------------|------|
| IR前 |  | 0.08 |
| IR后 |  | 0.10 |

1. MATERIAL: SEE "TABLE 1";
2. FINISH: SEE "TABLE 1";
3. ELECTRICAL:
  - 3.1. VOLTAGE RATING: 12 VAC RMS;
  - 3.2. CURRENT RATING: 0.5 AMP;
  - 3.3. CONTACT RESISTANCE: 30mΩ Max.(Initial),  
50mΩ Max.(After Life test);
  - 3.4. INSULATION RESISTANCE: 1000 MΩ Min., 500VDC.(Initial),  
100 MΩ Min., 500VDC.(After Humidity test);
  - 3.5. WITHSTAND VOLTAGE: 500 VAC RMS 50(60)Hz, 1 minute;
4. MECHANICAL:
  - 4.1. MATING FORCE: 3.0Kgf MAX.;
  - 4.2. UNMATING FORCE: 0.3Kgf MIN.;
  - 4.3. OPERATING LIFE: 5000 CYCLES MIN.;
5. ENVIRONMENTAL:
  - 5.1. OPERATION: -30°C~+80°C.

|     |           |     |           |              |                    |          |
|-----|-----------|-----|-----------|--------------|--------------------|----------|
| ⑦   | Housing   | 1   | HIGH TEMP | Black        |                    |          |
| ⑥   | CONTATC_6 | ⑥   | 1         | COPPER ALLOY | Au 2u" Min. PLATED | T=0.20mm |
| ⑤   | CONTATC_5 | ⑤   | 1         | COPPER ALLOY | Au 2u" Min. PLATED | T=0.20mm |
| ④   | CONTATC_4 | ④   | 1         | COPPER ALLOY | Au 2u" Min. PLATED | T=0.20mm |
| ③   | CONTATC_3 | ③   | 1         | COPPER ALLOY | Au 2u" Min. PLATED | T=0.20mm |
| ②   | CONTATC_2 | ②   | 1         | COPPER ALLOY | Au 2u" Min. PLATED | T=0.20mm |
| ①   | CONTATC_1 | ①   | 1         | COPPER ALLOY | Au 2u" Min. PLATED | T=0.20mm |
| NO. | PART NAME | QTY | MATERIAL  | DESCRIPTION  | REMARK             |          |


|      |     |
|------|-----|
| X.xx | ±1° |
| X.x  | ±3° |
| X.   | ±5° |



东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD.

THIRD ANGLE PROJECTION

|        |       |        |
|--------|-------|--------|
| SCALE: | SIZE: | SHEET: |
| 1:1    | A4    | 1 / 1  |




mm

---


1.1

A4

1/1

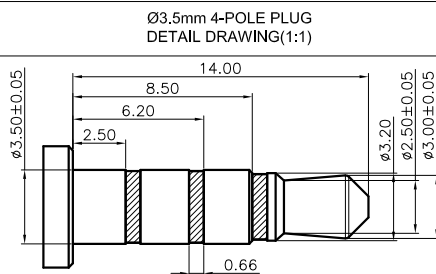

AFTER INSERT SCHEMATIC

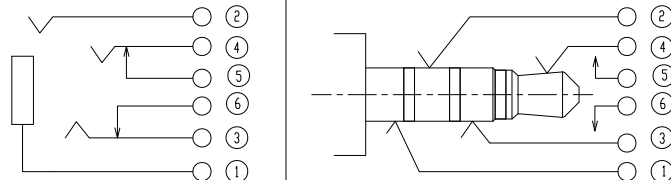

|   |             |      |                   |            |        |          |            |            |
|---|-------------|------|-------------------|------------|--------|----------|------------|------------|
| A |             |      |                   |            | DESIGN | 任翔       | 2016.06.06 |            |
|   | JH2016—068  | X1   | 根据客户要求增加IR前后平面度要求 | 2016.06.06 | 任翔     |          |            |            |
|   | 20150805001 | X    | NEW DRAWING       | 2015.08.14 | 任翔     | CHECK    | 郑小伟        | 2016.06.06 |
|   | ECN NO.     | REV. | DESCRIPTION       | DATE       | CHANGE | APPROVAL | 吕海涛        | 2016.06.06 |