

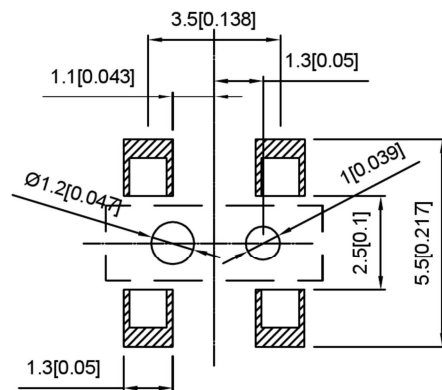

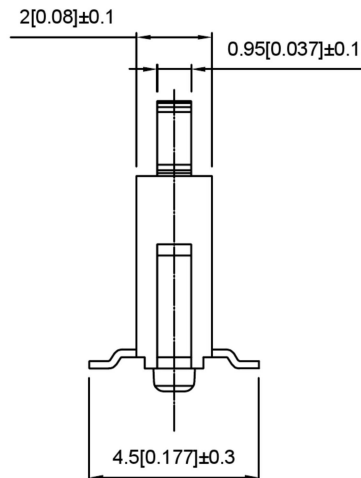
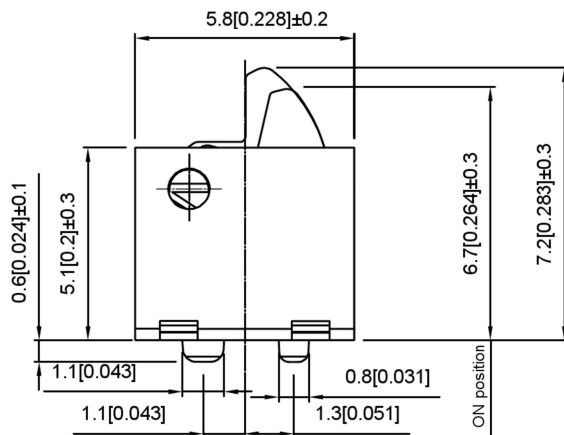
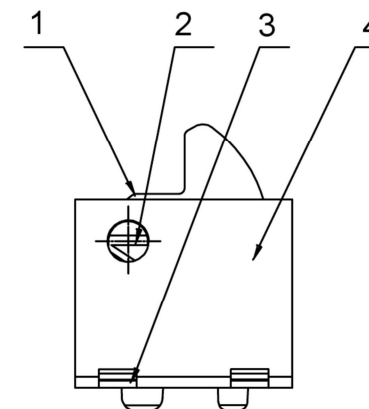




PCB

Rated range:50mA DC12V  
Insulation resistance:≥100MΩmin (DC100V)  
Contact resistance:≤300mΩ  
Compressive strength:AC100V(50/60Hzfoy1 minute)  
Mechanical life:50000 cycles  
Operating temperature:-10℃~+60℃  
Operation strength:50±30gf



|      |              |     |                    |                   |
|------|--------------|-----|--------------------|-------------------|
| 4    | Button       | 1   | PPA                | black             |
| 3    | Spring       | 1   | Phosphorous copper | plate with silver |
| 2    | Welding foot | 1   | corrH62-0.2        | silvery           |
| 1    | Pedestal     | 1   | PPA                | black             |
| ITEM | PAPT NAMF    | QTY | Material           | colour            |

|                                                      |      |         |          |             |                        |
|------------------------------------------------------|------|---------|----------|-------------|------------------------|
|                                                      |      |         |          | ANGLAR      | ±5°                    |
|                                                      |      |         |          | L ≤ 4       | ±0.2                   |
|                                                      |      |         |          | 4 < L ≤ 16  | ±0.3                   |
|                                                      |      |         |          | 16 < L ≤ 63 | ±0.4                   |
|                                                      | DATE | REVISED | APPROVED | L > 63      | ±0.5                   |
|                                                      |      |         |          |             | UNSPECIFIED TOLERANCES |
| www.alpsr.com    www.gdxidz.com    www.xbsswitch.com |      |         |          |             |                        |



|      |  |             |                              |
|------|--|-------------|------------------------------|
| DSND |  | SCALE: N/A  | MODEL TYPE:<br>DETECT SWITCH |
| DWN  |  | VIEW:       | PART NO.:<br>TM-1627S        |
| CHKD |  | UNIT: mm/in | DWG NO.:                     |
| APPD |  | SIZE: A4    |                              |
|      |  | WEIGHT      | SHEET                        |
|      |  |             | 1/1                          |
|      |  | REVISIC     | A0                           |

DONG GUAN XI BANG ELECTRONIC CO., LTD