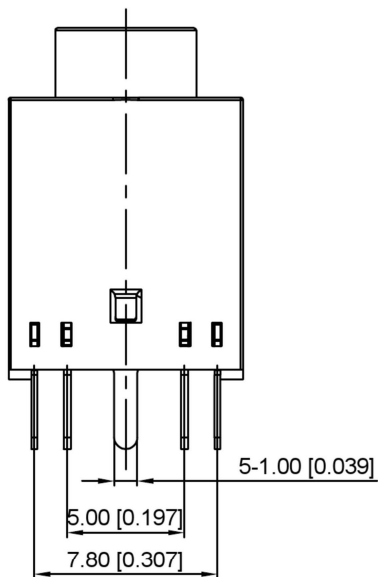
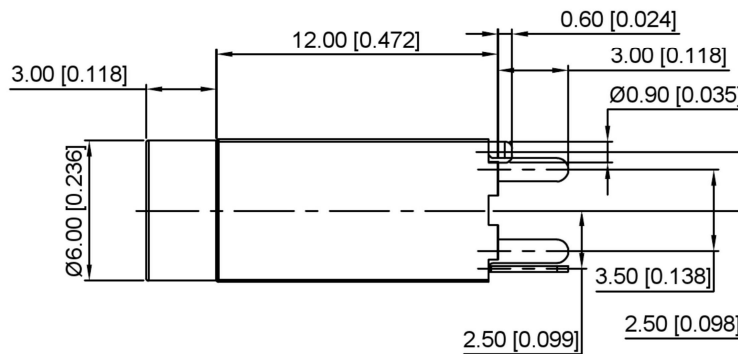
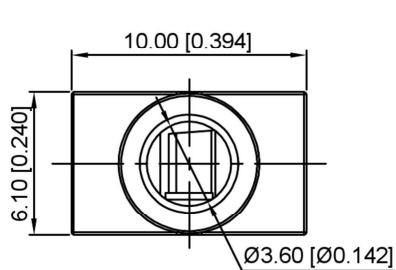


PCB HOLES(TOP VIEW)
GENERAL TOLERANCE:0.1mm

Model No.	PJ-3582-	PJ-3583-
Schematic		
color	B:Black W:White	

Temperature	-20~70 C
Rated Load	DC 30V 0.5A
Contact Resistance	<0.03Ω
Insulation Resistance	>100MΩ
Withstand Voltage	AC500V(50Hz)/min
Actuating Force	3~30N
Life	5000 Cycles

	MATERIAL	PLATING
terminal 2	Phosphor Bronze	cusn
terminal 3	Phosphor Bronze	snsb
terminal 4	Phosphor Bronze	snsb
terminal 5	BRASS	cusn
terminal 6	BRASS	cusn
plastic	PBT	

				ANGULAR	±5°
				L ≤ 4	±0.2
				4 < L ≤ 16	±0.3
				16 < L ≤ 63	±0.4
				L > 63	±0.5
REVISIONS				UNSPECIFIED TOLERANCES	
www.alpsr.com www.gdxjdz.com www.xbswitch.com					



DONG GUAN XI BANG ELECTRONIC CO., LTD

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	3.5 PHONE JACK
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	PJ-358X-X
			DWG NO.:
			WEIGHT
			SHEET
			REVISION
			1/1
			A0