

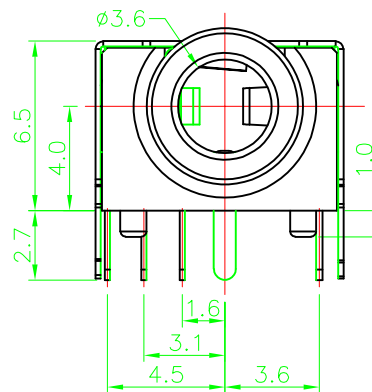
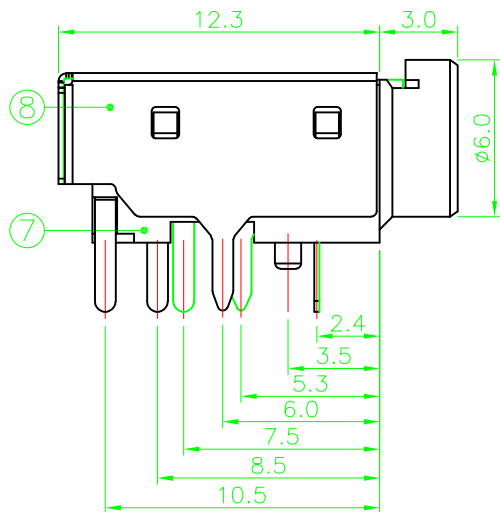

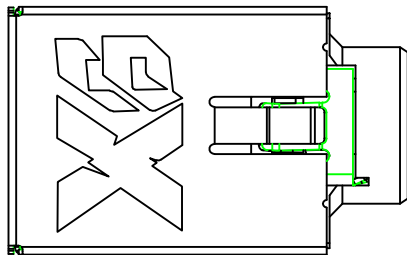
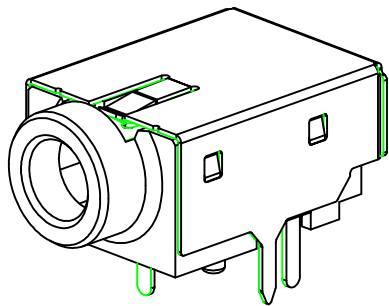
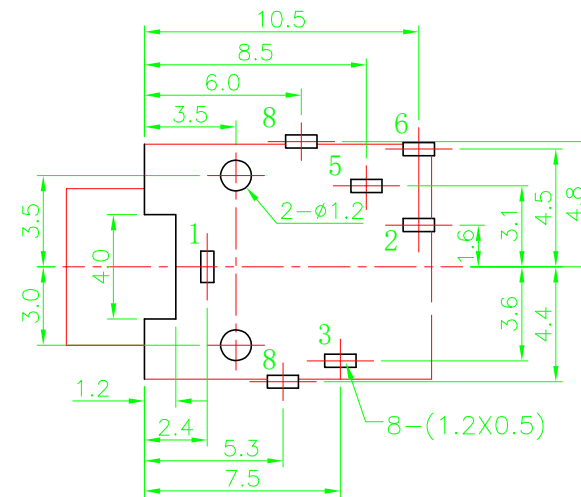


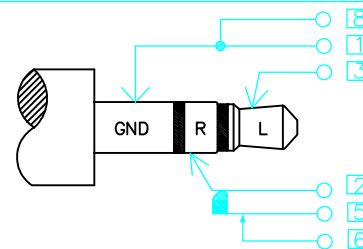

SCHEMATIC



P.C.B LAYOUT
TOP VIEW

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-30N;
6. life test: 5,000 cycles.




8	SHELL	1	SUS	Ni60U"
7	HOUSING	1	PA9T	
6	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag10u" OVER Ni20U"
5	SPRING PIECE	1	PHOSPHOR BRONZE	Ag10u" OVER Ni20U"
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag10u" OVER Ni20U"
2	SPRING PIECE	1	PHOSPHOR BRONZE	Ag10u" OVER Ni20U"
1	CONTACT FOOT	1	PHOSPHOR BRONZE	Ag10u" OVER Ni50U"
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

UNLESS OTHERWISE
SPECIFIED TOLERANCES

XB 东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD.

DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:		
					2021.11.23	Φ 3. 5 PHONE JACK		
DIM	TOL	DIM	TOL	CHECK:		PART NO.		
X.	±0.50	X.	±2°			XB-PJ03505-0880-00000H	SHEET: 1/1 REV.: A1	
X.X	±0.30	X.X	±1°				DRAWING NO	
X.XX	±0.20	X.XX	——					
X.XXX	±0.10	X.XXX	——					
		UNIT: mm		APPROVED	Andy			
3RD ANGLE PROJECTION					2021.11.23			

REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

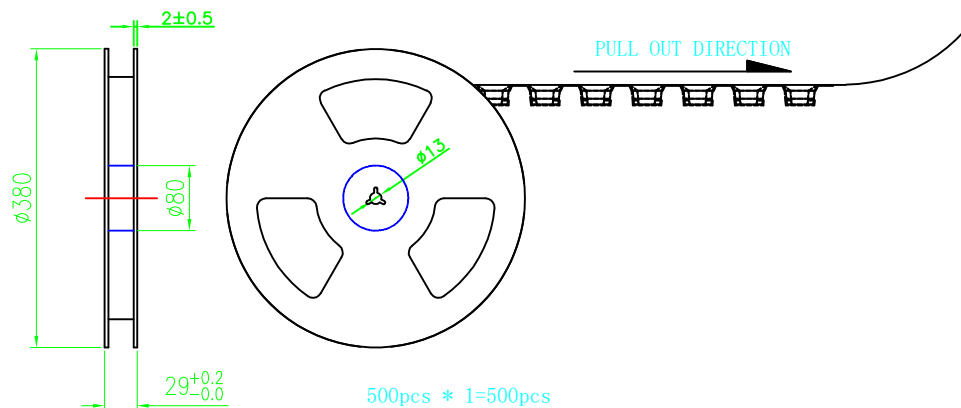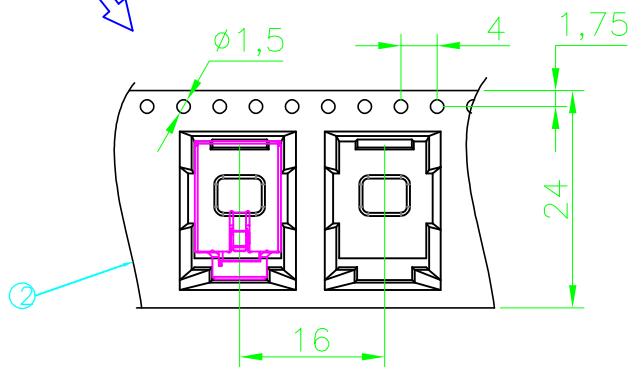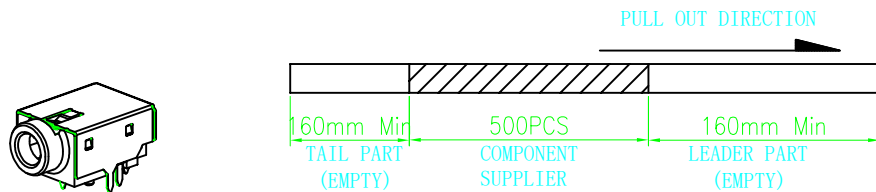

1. 包装方式:

- 1.1. 使用半自动包装机, 先将CARRY TAPE 送入导轨中, 并与COVER TAPE 贴合在上面, 其中初始160mm Min空槽不要放产品, 然后将产品如图所示方向依次放入CARRY TAPE内, 每个槽放1PCS, 每REEL共包装产品500PCS, 最后需留160mm Min空槽不放产品.
- 1.2. 用胶带将CARRY TAPE粘在一起, 外圈再用塑胶带(电周波)缠绕一圈, 按客户求在REEL上贴上LABEL, 注明料号, 日期, 数量.
- 1.3. 如图示, 将装好的REEL装入PE袋内, 再将其放入CARTON内, 最后用胶带封箱, 并在纸箱外相应的地方贴上标签.


注意:

1. 防止漏装, 禁止碰歪产品锡脚;
2. 产品在 CARRY TAPE中的方向须如图所示 (BOSS的方向)

2. 包装数量:

500pcs/REEL
10REEL (5000PCS) /CARTON

3. 单重: 1.10g

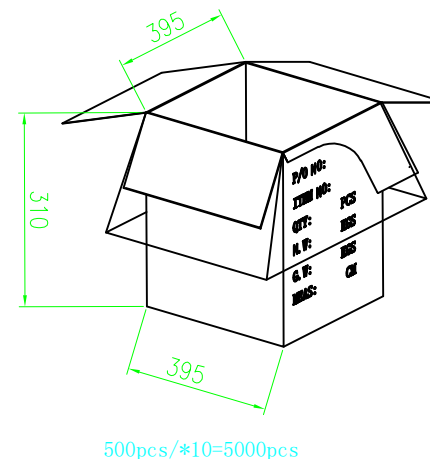

UNLESS OTHERWISE SPECIFIED TOLERANCES				XB 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
DECIMALS:		ANGLES:		DESIGN:	Tony	PART NAME:	
DIM	TOL	DIM	TOL	CHECK:	2021.11.23	Φ3.5 PHONE JACK	
X.	±0.50	X.	±2°		Andy	-包装图	
X.X	±0.30	X.X	±1°			PART NO.	
X.XX	±0.20	X.XX	—			XB-PJ03505-0880-00000H	
X.XXX	±0.10	X.XXX	—	APPROVED	2021.11.23	SHEET: 1/1	REV.: A1
3RD ANGLE PROJECTION				UNIT: mm	DRAWING NO		