

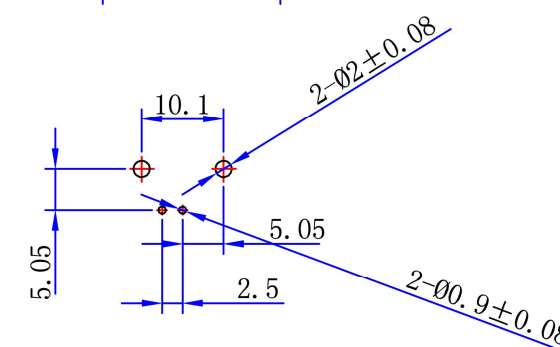


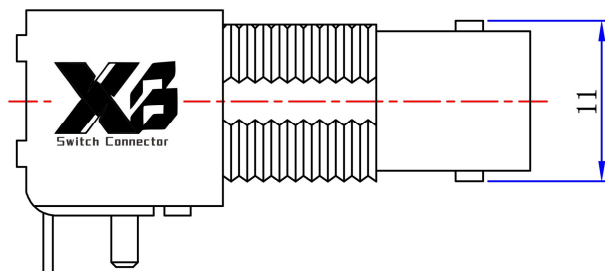

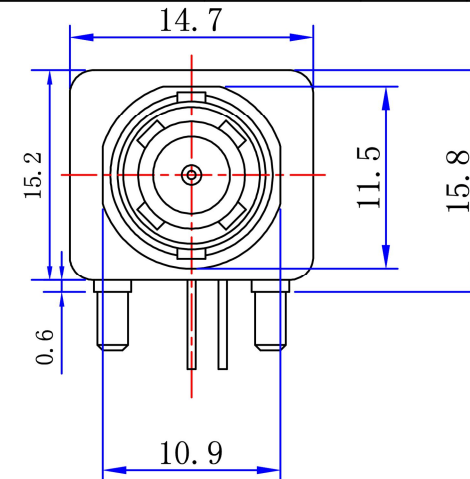


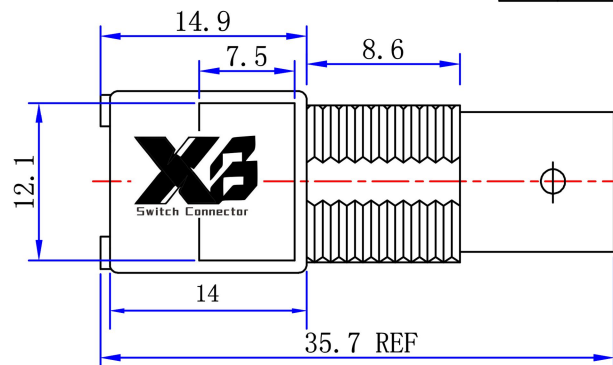

Product NO. XB-801-0035

REV	DESCRIPTION	DWN	DATE	APPROVEN
A	First issue	CHEN	2016/2/25	John kine

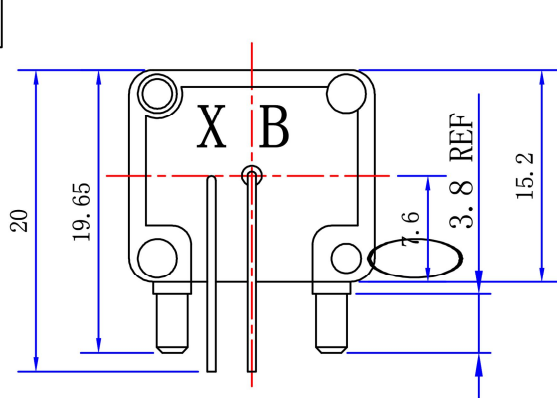

Specifications

Impedance:75 Ohms

Frequency Range:DC0~3G

VSWR:1.3MAX

Working Voltage:500V rms @ sea level

Insulation Resistance:5000 Ohms min

Temperature Range:-55°C TO +155°C

Relative Temperature:≤95%(40° C±2° C)

Drawings products are in line with ROHS standards

NOTE:


E	LOCK WASHER	BRASS	NICKEL	1
D	HEX NUT	BRASS	NICKEL	1
C	INSULATOR	POM	NONE	1
B	CONTACT	BRASS	GOLD	1
A	BODY	ZINC	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISHED	QTY

DRAWN	2016/2/25
Zelin.CHEN	
CHECKED	
APPROVALS	29.2.2016
John Kine	

Tolerance

0-6	±0.15
6-30	±0.20
30-120	±0.5
Angular	±2°

View



UNIT

MM

SCALE

1:1

东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

Name: BNC CONNECTOR DNN

SIZE A Product NO. XB-801-0035

REV B

DateTime 2016/2/25

CAD FILE
D/company drawings/BD

SHEET: 1 OF 1