


ROHS

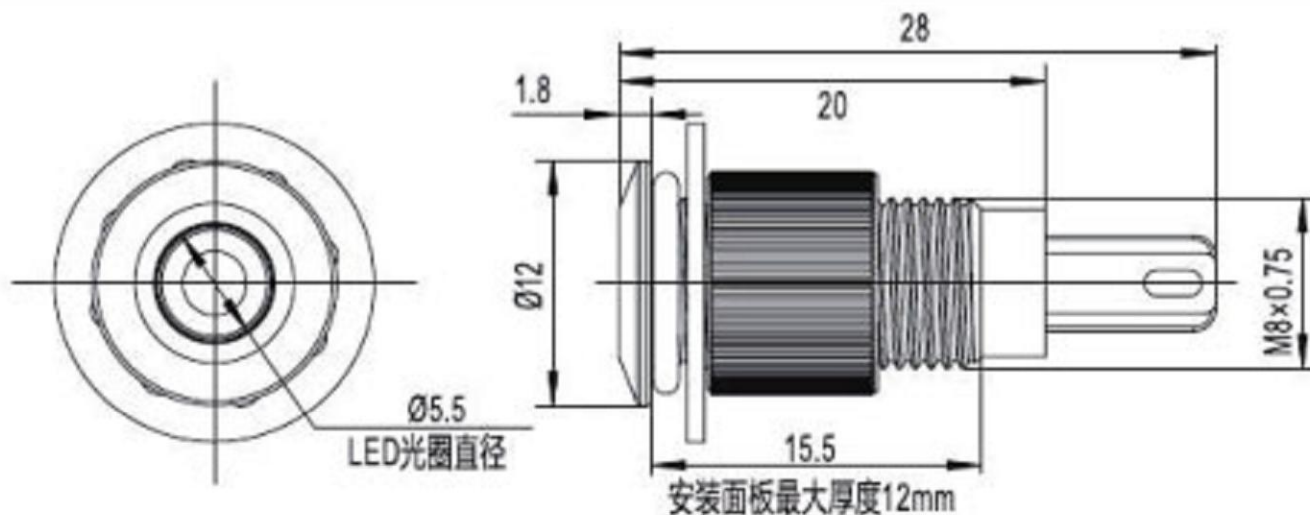

SPECIFICATIONS

Circuit	:SPST
Current rating	:0.5A
Voltage rating	:250VAC
Dielectric withstanding voltage	:1000VAC for 1 minute
Contact resistance	:50m Ω Max
Insulation resistance	:100M Ω Min
Travel	:2.0mm $\pm$ 0.5mm
Operating Force	:600 $\pm$ 200gf
Mechanical Life	:Over 100,000 cycles
Electrical Life	:Over 50,000 cycles
Manual Welding	:350°C for 3 seconds
Function	:OFF-(ON)
Operating temperature	: -20°C ~ +85°C
Level of Protection	: IP65

MATERIAL:

Base: SUS;
Cap: SUS;
Terminal: Copper, Golden plated ;
Nut: Brass, NI Plated .

安裝尺寸Diameter: $\varnothing 8$ mm

燈珠類型Type:LED

燈珠顏色Color: R G B Y C M W

電壓等級Voltage Rating: ≤ 220 V

額定電流Rated Current:

約15mA About 15mA

外殼材料The Crust Material:

S/不銹鋼 Stainless steel N/黃銅鍍鉻 Copper plating

防護等級IP Degree:IP67,IK10

MATERIAL:

Actuator: SUS ;
Top Base: SUS;
Bottom Base:PA66+GF ;
Terminal: Brass,Silver plated ;
Nut: Brass, Ni plated .

LED Specifications

W6	白色	5.0	6.0	9.0	15
U6	藍色	5.0	6.0	9.0	15
G6	純綠色	5.0	6.0	9.0	15
Y6	黃色	5.0	6.0	9.0	15
R6	紅色	5.0	6.0	9.0	15
W3	白色	2.8	3.0	3.4	15

LED 类型	双向LED灯珠（交直流通用）			U3	蓝色	2.8	3.0	3.4	15
寿 命	40000小时（参考值）			G3	纯绿色	2.8	3.0	3.4	15
额定电压	AC/DC12V	AC/DC24V	AC/DC110V	Y2	黄色	1.8	2.0	2.4	15
	AC/DC36V	AC/DC48V	AC/DC220V	R2	红色	1.8	2.0	2.4	15
额定电流	约15mA		约3mA	灯发光颜色 X Emitted color X	最小	一般	最大	额定 电流 (mA)	
降压方式	采用3V灯，需内置电阻				顺向电压(V)				

The material contained in this drawing is the property of XiBang. Any use other than that specifically authorized by XiBang is prohibited. The above drawing IS subjected to change for improvement without prior notice.

 Switch Connector		东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO.,LTD									
		TITLE : METAL PUHS BUTTON SWITCH									
		MODEL : XB-PBM10-I-D03-B1 指示灯									
UNIT : MM		DWN.	ZENQ. CHEN	DATE	TOLERANCE <=1.5mm±0.1 > 1.5mm±0.2 >=10mm±0.3	ANGLE ±2°					
SCALE : 3 : 1		CHK'D	PENG. GAO	DATE							
VERSION	01	APPD.	FEI. LONG. HE	DATE							
							7	SPRING	STEEL WIRE	1	NATURE
							6	STEEL BALL	STEEL	1	NATURE
							5	BOARD	PHENOLIC RESIN	1	NATURE
							4	CONTACT CLIP	PBS STRIP	2	Ag PLATED
							3	FRAME	IRON STRIP	1	Ni PLATED
							2	TERMINAL	BRASS STRIP	8	Ag PLATED
							1	KNOB	POM	1	BLACK
							NO.	PART NAME	MATERIAL	QTY.	FINISHING