
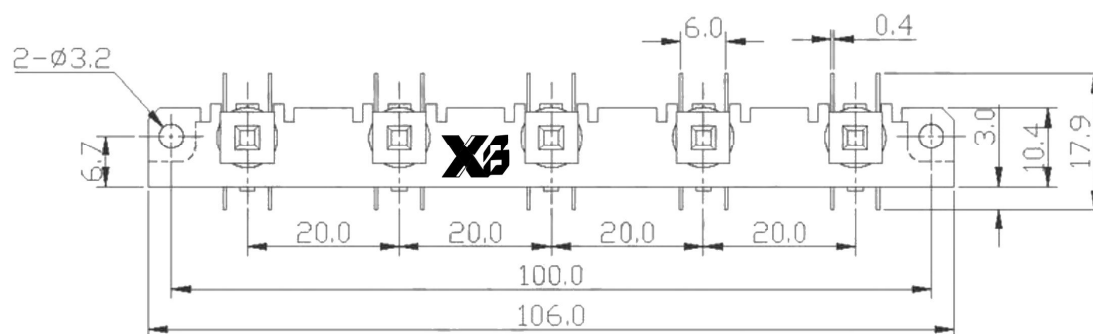
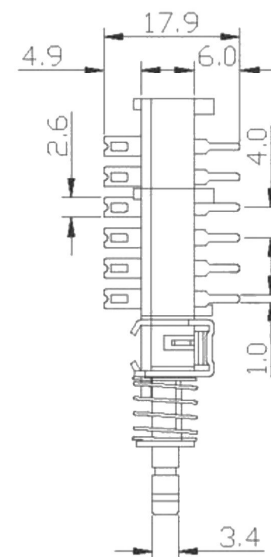


# ROHS

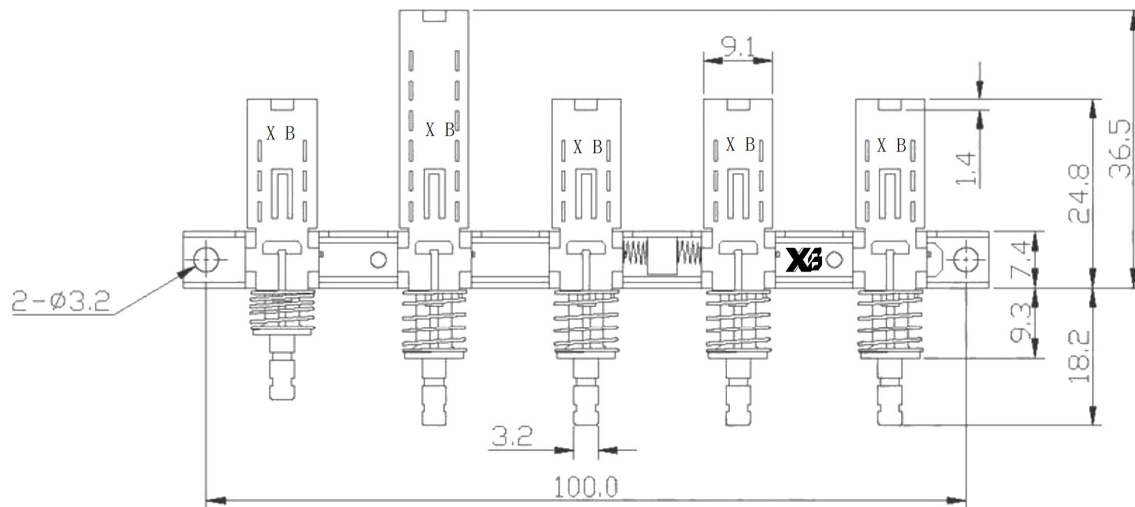

ITEM: PERFORMANCE

Title: PUSH BUTTOMN SWICH

Model: XB-PBS-5D-IAIBA3-F18H

Rating: 0.3A 0.5A 12V 30V DC

Function: 6P2T

Timing:Non-shorting

ContactResistance(mohms):50mΩ max

Insulation Resistanc(Mohms):100M $\Omega$  min at 500V DC

Dielectric Strength(V):AC 500V for 1 min

LifeTest:10,000 Cycles



东莞市溪榜电子有限公司  
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : PUSH BUTTON SWITCH

MODEL : PBS-5D-1A1B1A3-F18H (W009)



|               |    |       |  |      |  |                                                          |                  |
|---------------|----|-------|--|------|--|----------------------------------------------------------|------------------|
| UNIT : MM     |    | DWN.  |  | DATE |  | TOLERANCE<br><= 5.0mm±0.1<br>> 5.0mm±0.2<br>> 10.0mm±0.3 | ANGLE TOL<br>±2° |
| SCALE : 1 : 1 |    | CHK'D |  | DATE |  |                                                          |                  |
| VERSION       | 02 | APPD. |  | DATE |  |                                                          |                  |

|     |                |             |     |            |
|-----|----------------|-------------|-----|------------|
|     |                |             |     |            |
| 8   | SPRING         | STEEL STRIP | 1   | NATURE     |
| 7   | FRAME          | IRON STRIP  | 1   | Ni PLATED  |
| 6   | BOARD          | PC          | 5   | NATURE(透明) |
| 5   | SPRING         | STEEL WIRE  | 16  | NATURE     |
| 4   | CONTACT CLIP   | COPPER      | 10  | Ag PLATED  |
| 3   | EARTH TERMINAL | BRASS STRIP | 36  | Ag PLATED  |
| 2   | KNOB           | POM         | 5   | WHITE      |
| 1   | COVER          | PC          | 5   | BLACK      |
| NO. | PART NAME      | MATERIAL    | QTY | FINISHING  |