

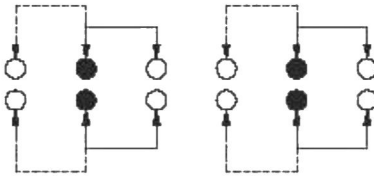
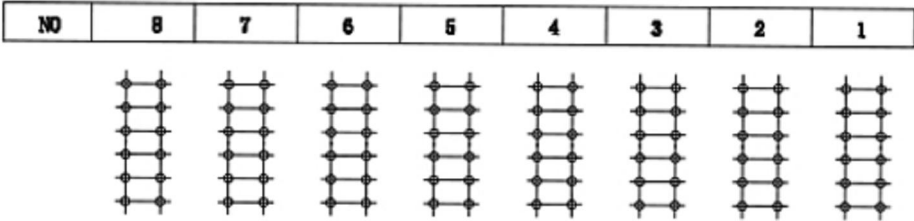


ROHS

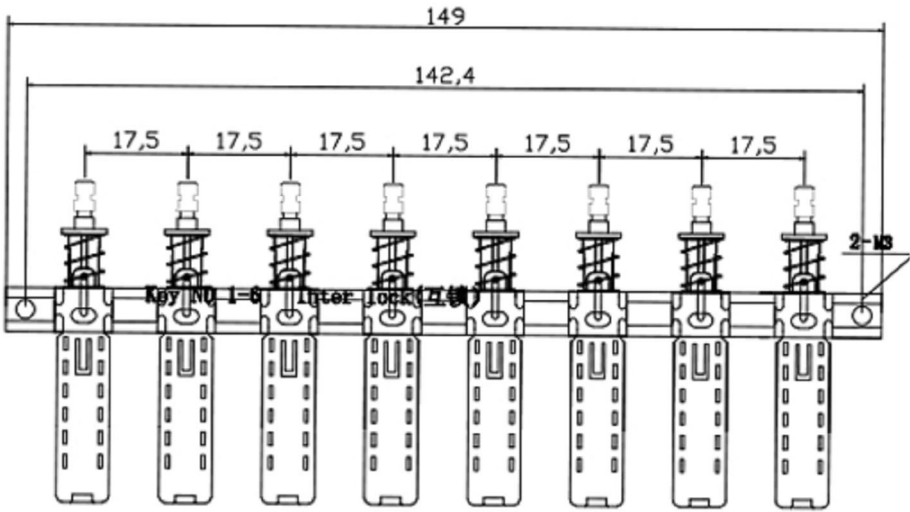

SCHEMATIC

- 1 KEY(开关) NO 1-8 Circul (型号) 2C-4P(12P)
travel lock 3.5mm
fuli 4.8mm
- 2 Key NO 1-6 Inter lock(互锁)
- 3 Key NO 1-8 pitch(间距) 17.5mm
- 4 铁架4按装孔 分别是2-M3和2-Φ3.2
- 5 Terminal style

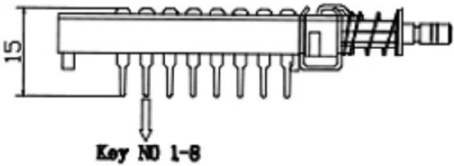


ITEM: PERFORMANCE
Title: PUSH BUTTOMN SWITCH
Model: XB-PBS-62H18-17.5S8A
Rating: 0.3A 0.5A 12V 30V DC
Function: 4P2T
Timing:Non-shorting
ContactResistance(mohms):50mΩ max
Insulation Resistanc(Mohms):100MΩ min at 500V DC
Dielectric Strength(V):AC 500V for 1 min
LifeTest:10,000 Cycles



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO., LTD

TITLE : XB PUHS BUTTON SWITCH

MODEL :XB-PBS-62H18-17.5S8A 琴键开关互动6联 4路2组



UNIT : MM		DWN.	ZENQ. CHEN	DATE	2024-05-08
SCALE : 3 : 1		CHK'D	PANG. DONG	DATE	2024-05-08
VERSION	01	APPD.	FEI. LONG. HE	DATE	2024-05-08

TOLERANCE
<=1.5mm ± 0.1
>1.5mm ± 0.2
>=10mm ± 0.3

ANGLE
± 2°

8	CONTACT CLIP	PBS STRIP	2	Ag CLAD
7	RING	IRON STRIP	1	Zn PLATED
6	SPRING	SUS	1	NATURE
5	SLEEVE	POM	1	GRAY
4	CASE	NYLON	1	GRAY
3	COVER	PBT	1	GRAY
2	TERMINAL	BRASS STRIP	6	Ag PLATED
1	KNOB	POM	1	YELLOW
NO.	PART NAME	MATERIAL	QTY.	FINISHING