
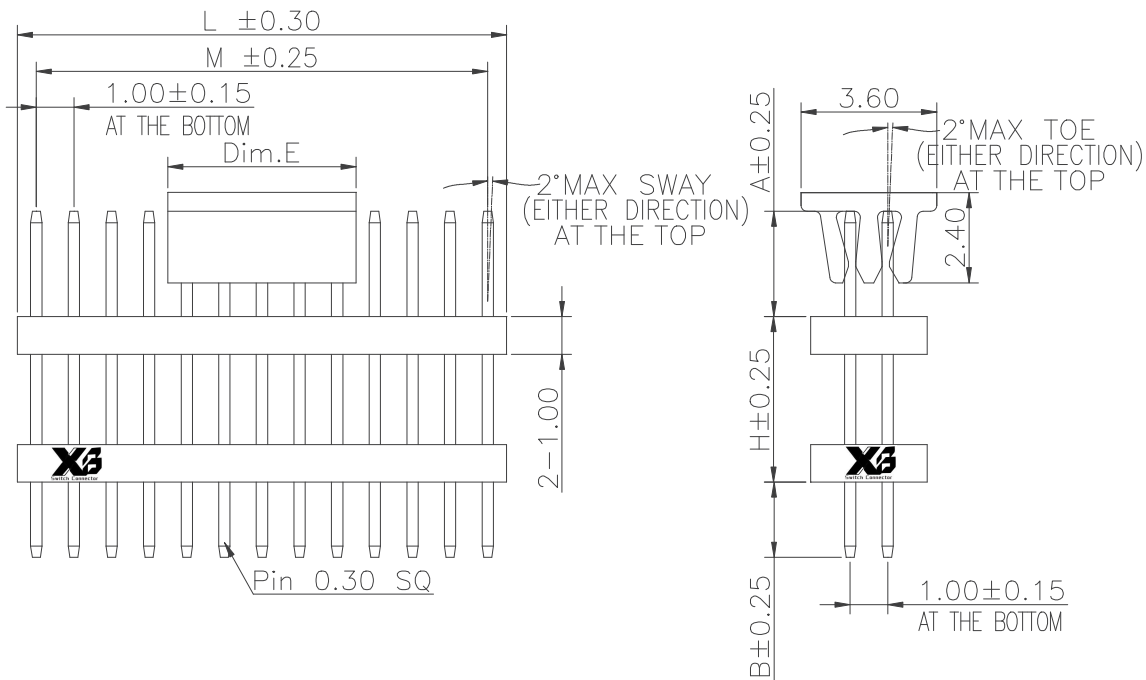


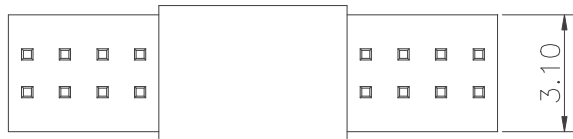

Specifications
Current Rating:1.0Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:300VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials
Contact Material:Phosphor Bronze
Insulator Material:High Temperature Thermoplastic, UL 94V-0 LCP
or the equivalent material
All materials must meet XI BANG hazardous substances control standards.


Dim.E	NOTE
3.00mm	02~04Pins
5.00mm	05~40Pins

No. of PIN/ROW	Dimension Information	
	M	L
02	1.00	2.00
03	2.00	3.00
04	3.00	4.00
05	4.00	5.00
06	5.00	6.00
07	6.00	7.00
08	7.00	8.00
09	8.00	9.00
10	9.00	10.00
11	10.00	11.00
12	11.00	12.00
13	12.00	13.00
14	13.00	14.00
15	14.00	15.00
16	15.00	16.00
17	16.00	17.00
18	17.00	18.00
19	18.00	19.00
20	19.00	20.00
21	20.00	21.00
22	21.00	22.00
23	22.00	23.00
24	23.00	24.00
25	24.00	25.00
26	25.00	26.00
27	26.00	27.00
28	27.00	28.00
29	28.00	29.00
30	29.00	30.00
31	30.00	31.00
32	31.00	32.00
33	32.00	33.00
34	33.00	34.00
35	34.00	35.00
36	35.00	36.00
37	36.00	37.00
38	37.00	38.00
39	38.00	39.00
40	39.00	40.00

Ordering Information

Plastic specifications 1=Single row 2=Dual row 3=Tripe row 4=Quadruple	Water code 203	No. of Pins per Row 02~40	Positioning column information XX	Plating code 01=Tin 02=Gold Flash 05=Gold Flash/Tin 22=Matte Tin	A=No locating post B=Round post C=Square post	Pin length See the drawing	Insulator Material A=PBT R=Nylon(Halogen Free) C=LCP	Color 1=Black 2=White 3=Yellow E=Beige	Contact Material A/S/K/T=Phosphor Bronze B/Z/H/W=Brass	Packing code A=Box B=Tray C=Tube D=Tape&Reel E=Cap+Tube F=Cap+Tape&Reel G=Acetate Tape+Tube H=Acetate Tape+Tape&Reel
--	-------------------	------------------------------	--------------------------------------	--	---	-------------------------------	---	--	--	--

Recommended P.C.Board
Layout
(Tolerance:±0.05)



XB 东莞市溪榜电子有限公司
Switch Connector DONG GUAN XI BANG ELECTRONICS CO., LTD.

REV.	UNIT.	SCALE.	PAGE.	
01	mm	5:1	1/1	

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DWG. NO.

XB-PZ-A-10-203

PART NO.

TITLE.

1.00 PIN HEADER
DUAL ROWS DIP TYPE
CONNECTOR