


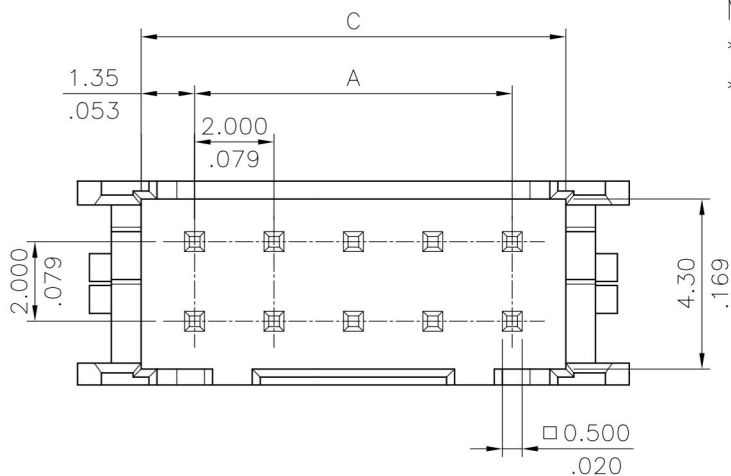

Material:

* Insulation: Nylon 66 UL 94V-0

* Contact: Brass

Ordering Code:

CI01 ** P 1 P D 0
① ② ③ ④ ⑤ ⑥ ⑦

① Series No.

② No. of Circuits:



③ P= Pin header

④ Plating: 1= 3.05 μ m(120 μ ") Min. Tin over
0.76 μ m(30 μ ") Nickel

⑤ Type: P= Adapter

⑥ D= Dual Row Type

⑦ Other Option: 0= Color Nature(Standard)

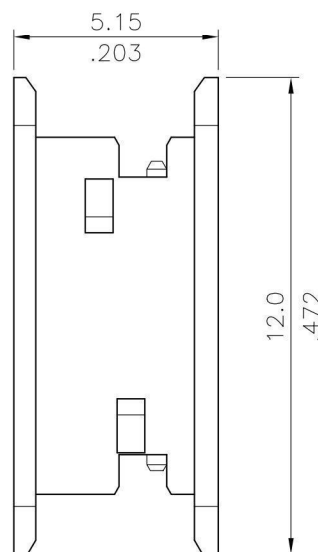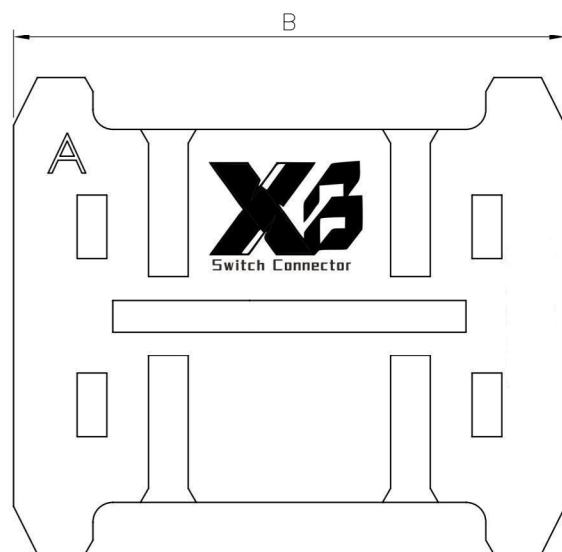

Circuits	Dimension		
	A	B	C
6	4.00(.157)	9.9(.390)	6.70(.264)
8	6.00(.236)	11.9(.469)	8.70(.343)
10	8.00(.315)	13.9(.547)	10.70(.421)
12	10.00(.394)	15.9(.626)	12.70(.500)
14	12.00(.472)	17.9(.705)	14.70(.579)
16	14.00(.551)	19.9(.783)	16.70(.657)
18	16.00(.630)	21.9(.862)	18.70(.736)
20	18.00(.709)	23.9(.941)	20.70(.815)
22	20.00(.787)	25.9(1.020)	22.70(.894)
24	22.00(.866)	27.9(1.098)	24.70(.972)
26	24.00(.945)	29.9(1.177)	26.70(1.051)
28	26.00(1.024)	31.9(1.256)	28.70(1.130)
30	28.00(1.102)	33.9(1.335)	30.70(1.209)
32	30.00(1.181)	35.9(1.413)	32.70(1.287)
34	32.00(1.260)	37.9(1.492)	34.70(1.366)

Halogen-Free

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: 2.00MM(.079")	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.			
③				DRAWN BY: Eager	04/20-07'	TOLERANCE UNLESS OTHERWISE SPECIFIED	WIRE TO WIRE CONNECTOR				
②				ENGINEER: Eisley	04/24-07'	.X $\pm$ 0.30/.012 X' $\pm$ 1'	MATERIAL:	DRAWING NO. CI0199SA	PART NO. CI01**P1PDO		
①	Eager	04/20-07'	ECN07135	CHECKED BY: David	04/25-07'	.XX $\pm$ 0.20/.008 X' $\pm$	FINISH:			SCALE	5 / 1
SYM	NAME	DATE	REVISIONS	APPROVED BY: David	04/25-07'	.XXX $\pm$ 0.10/.004 XX' $\pm$				SHEET	1 OF 1