

Notes:





- * Insulation: Nylon 6T, Color Nature
- * Contact: Brass
- * Circuit Pattern Schedule:
See Drawing No: CP0111S*
- * For Lead Free Wave Flow Process

Part No.	Dimension	
	C	D
CP-013***90-NH	9.20(.362)	3.50(.138)
CP-013***9F-NH	9.20(.362)	13.00(.512)

Ordering Code:

CP-01 3 ** * 9 * -NH
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Type of Connector:
3= Straight PCB mount header
- ③ No of Circuits:
- ④ Plating Code:
1= $3.05\mu\text{m}(120\mu\text{'})$ Matte Tin over $0.76\mu\text{m}(30\mu\text{'})$ Nickel
2= Gold flash plated over Nickel
3= $0.38\mu\text{m}(15\mu\text{'})$ Gold plated over $1.27\mu\text{m}(50\mu\text{'})$ Nickel
4= $0.76\mu\text{m}(30\mu\text{'})$ Gold plated over $1.27\mu\text{m}(50\mu\text{'})$ Nickel
- ⑤ Variation:
9=Nylon 6T UL 94V-0,Color Nature with SQ pin
- ⑥ Pin Length Code: Pin Length= Dim.C ; Dim.D
- ⑦ NH= For Lead Free Wave Flow Processes & Halogen Free

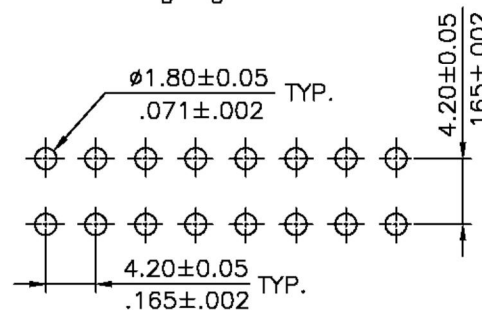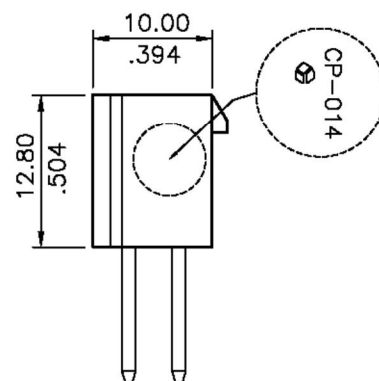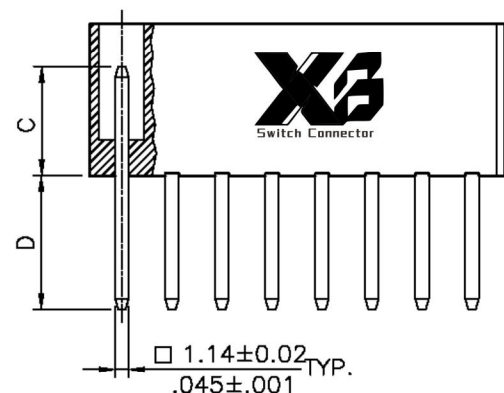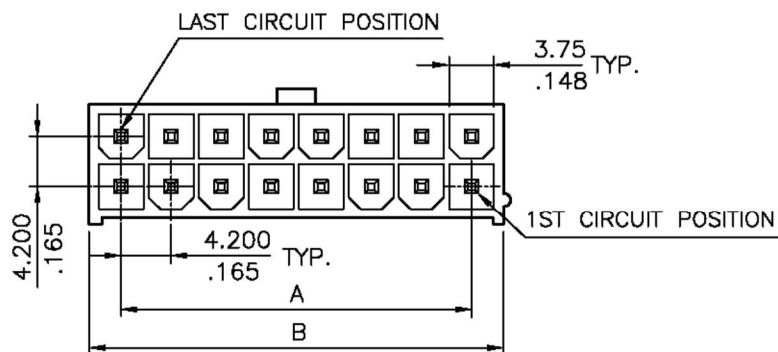

Recommended P.C. Board Layout

Halogen-Free

Lead Free Process

RoHS Compliant

④					DATE	UNIT: mm / inch	TITLE: STRAIGHT HEADER	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD.		
③				DRAWN BY:	Yushu	9/13-19'	CP-01 POWER CONNECTOR			
②				ENGINEER:	Sun	9/16-19'	MATERIAL:	DRAWING NO.	CP01272SA	PART NO.
①				CHECKED BY:	Eisley	9/16-19'				
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	9/16-19'	FINISH:	SCALE	2 / 1	SHEET 1 OF 1
							ACL1240			