


△ Shell: Steel, Nickel plated as standard

RoHS Compliant




4						DATE	UNIT: mm / inch		TITLE: D-SUB SOLDER CUP MALE CONNECTOR (MACHINED CONTACT)	XB Switch Connector 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD
3				DRAWN BY:	Karen	2/01-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED			
2				ENGINEER:	Sun	2/02-18'	.X ±0.30/.012	X: ± 1'	MATERIAL:	DRAWING NO. CD7102SC
1	Karen	1/31-18'	ECNT117262/ECRT117074	CHECKED BY:	Eisley	2/05-18'	.XX ±0.20/.008	.X ±		
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	2/05-18'	.XXX ±0.10/.004	.XX ±	SCALE 2 / 1	SHEET 1 OF 1

Material:

Insulator: Glass filled Polyester UL 94V-0
Color Black or White

Contact: Brass

① Shell: Steel, Nickel plated as standard

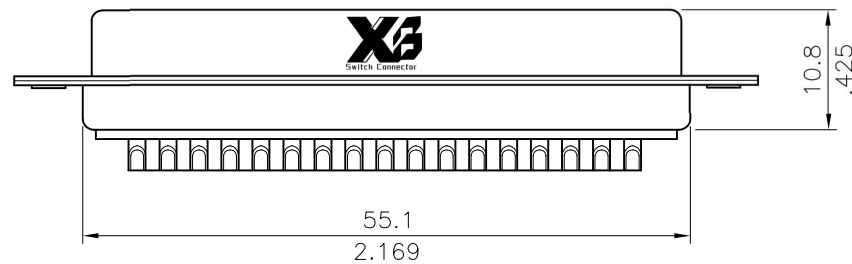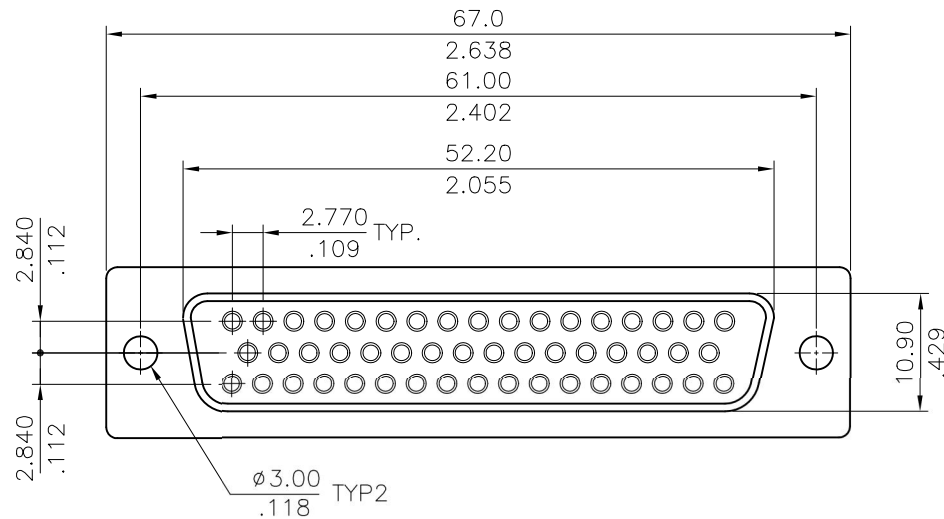

Ordering Code :

CD71 50 S * * 00
① ② ③ ④ ⑤ ⑥

- Series No.
- Contacts: 50
- Contact type : S=Receptacle
- Contact Plating :
 - 2 = Gold flash plated over 1.27um(50μ") Nickel (Standard)
 - 3 = 0.38um(15μ") Gold plated over 1.27um(50μ") Nickel
 - 4 = 0.76um(30μ") Gold plated over 1.27um(50μ") Nickel
 - 5 = 1.27um(50μ") Gold plated over 1.27um(50μ") Nickel
- Insulator Color :
 - 1=Black , 0=White
- Other option :
 - 00 = With ø3.00mm holes on shell

RoHS Compliant

④						DATE	UNIT: mm / inch	TITLE: D-SUB SOLDER CUP FEMALE CONNECTOR (MACHINED CONTACT)	 东莞市溪榜电子有限公司 DONG GUAN XI BANG ELECTRONICS CO., LTD			
③				DRAWN BY:	Karen	2/01-18'	TOLERANCE UNLESS OTHERWISE SPECIFIED					
②				ENGINEER:	Sun	2/02-18'	.X ±0.30/.012 X' ± 1'	MATERIAL:				
①	Karen	1/31-18'	ECNT117262/ECRT117074	CHECKED BY:	Eisley	2/05-18'	.XX ±0.20/.008 .X' ±	FINISH:	DRAWING NO.	CD7104SC	PART NO.	CD7150S**00
SYM	NAME	DATE	REVISIONS	APPROVED BY:	Eisley	2/05-18'	.XXX ±0.10/.004 .XX' ±		SCALE	2 / 1	SHEET	1 OF 1