


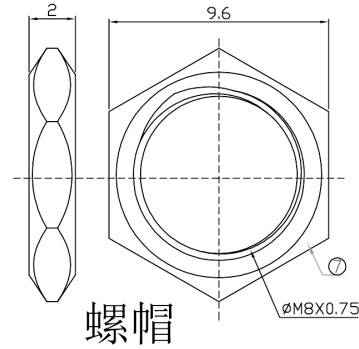
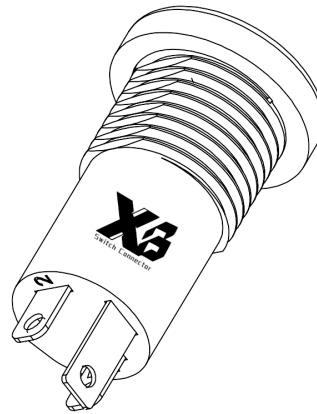


ROHS



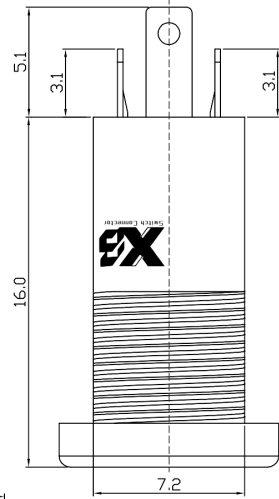


□: TERMINAL NO. ○: ITEM NO.


Matching Plug



T:1.6 Dimensions of PC board holes
Tolerance : ±0.1(Printed-sided view)

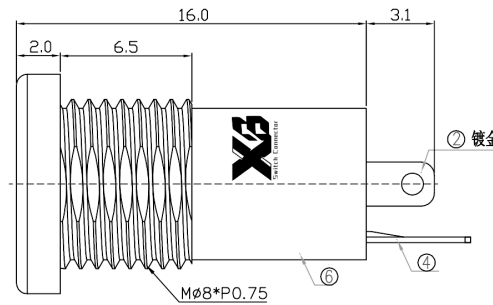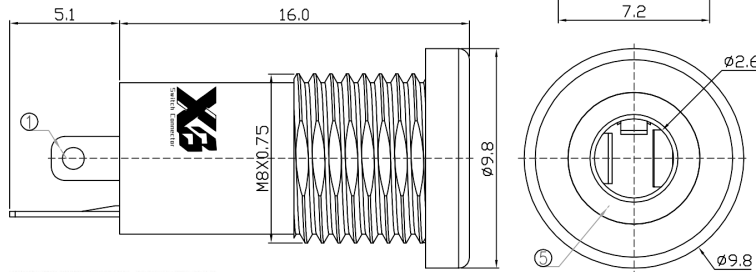


取付穴参考寸法
Mounting hole dimension



SPECIFICATION

- 1.Rating : DC 30V 0.5A ; 1.0A ;
- 2.Contact resistance : $\leq 30m\Omega$;
- 3.Insulation resistance : $\geq 100M\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-20N
- 6.life test : 5,000 cycles °

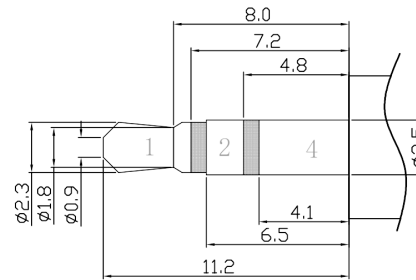


7	XB-PJ-291-3P-07	螺帽	1PCS	H59-3黄铜	镀锡	环保
6	XB-PJ-291-3P-06	基座	1PCS	PA9T/PA46/PPA	黑色	环保
5	XB-PJ-291-3P-05	铜套	1PCS	H59-3黄铜	镀金	环保
4	XB-PJ-291-3P-04	4号脚	1PCS	磷铜=0.25	镀银	环保
3	XB-PJ-291-3P-03	////	1PCS	////	////	环保
2	XB-PJ-291-3P-02	2号脚	1PCS	铍青铜=0.25	镀金	环保
1	XB-PJ-291-3P-01	1号脚	1PCS	铍青铜=0.25	镀银	环保
序号	零件图代号	名称	数量	材料	镀层/颜色	备注



东莞市溪榜电子有限公司
DONG GUAN XI BANG ELECTRONICS CO.,LTD

TITLE : XB Audio jack

MODEL : XB-PJ-291-3P 三极2.5耳机插座带螺母 焊板式



UNIT : MM	DWN.	ZENQ. CHEN	DATE	TOLERANCE	ANGLE TOL
SCALE : 3 : 1	CHK'D	DONG. PANG	DATE	$\leq 1.5mm \pm 0.1$ $> 1.5mm \pm 0.2$ $\geq 10.0mm \pm 0.3$	$\pm 2^\circ$
VERSION	01	APPD.	FEI. LONG. HE	DATE	

2	TERMINAL	PBS STRIP	5	Ag PLATED
1	HOUSING	PBT	1	BLACK
NO.	PART NAME	MATERIAL	QTY	FINISHING